
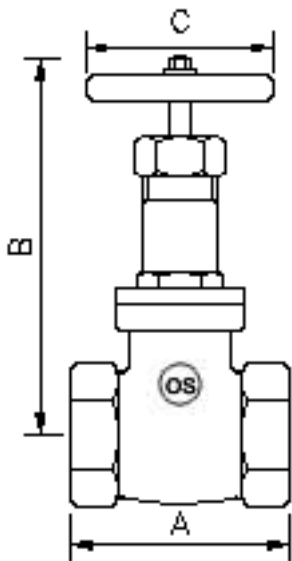


# Bronze Gate Valve

## Class 125 • Screwed in Bonnet • Rising Stem • Threaded Ends

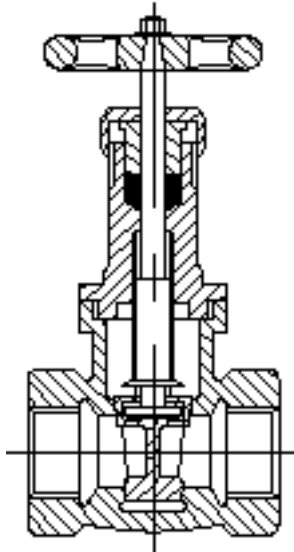

### Product no.112100-125

#### Size Range:

1/2 through 4 inches  
Max. temperature limit is 450°F (232°C)

#### Working Pressures

##### Non-Shock:

125 psi Steam, Basic Rating  
200 psi Cold Working Pressure

### Features

- Rising Stem
- Screwed Bonnet
- Solid Wedge Disc
- Threaded Ends
- Full Ports
- Back Seat
- Integral Bronze Seat
- Recommended for WOG
- MSS Specification SP-80

For more details please contact:  
[export@oswalvalve.com](mailto:export@oswalvalve.com)

Above size 3" manufacturers standard applicable.

### Principal Parts & Materials

Part	Material	ASTM
Body	Bronze	B62 alloy 83600
Bonnet	Bronze	B62 alloy 83600
Disc	Bronze	B62 alloy 83600
Stem	Brass	B16 alloy C36000

### Dimensions and Weights

Millimeters - Kilograms

DN	1/2" 15	3/4" 20	1" 25	1 1/4" 32	1 1/2" 40	2" 50	2 1/2" 65	3" 80	4" 100
A	60	60	70	80	90	100	105	125	-
B	130	160	190	215	250	305	380	430	-
C	55	65	70	85	95	105	120	140	-
WTS.	0.70	0.90	1.20	1.50	1.75	3.00	6.00	8.50	-