


Bronze Gate Valve

Class 150 • Screwed in Bonnet • Non-Rising Stem • Threaded Ends

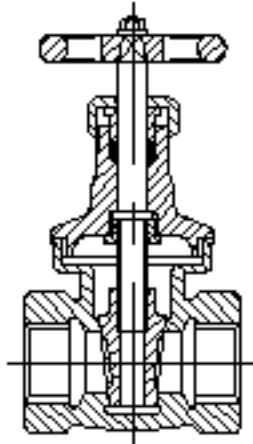

Product no.111100-150

Size Range:

1/2 through 4 inches
Max. temperature limit is 450°F (232°C)

Working Pressures

Non-Shock:


150 psi Steam, Basic Rating
300 psi Cold Working Pressure

Features

- Non-Rising Stem
- Screwed Bonnet
- Solid Wedge Disc
- Threaded Ends
- Full Ports
- Back Seat
- Integral Bronze Seat
- Recommended for WOG
- MSS Specification SP-80

For more details please contact:
export@oswalvalve.com

Above size 3" manufacturers standard applicable.

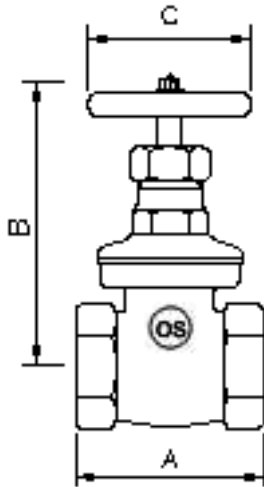

Principal Parts & Materials

Part	Material	ASTM
Body	Bronze	B62 alloy 83600
Bonnet	Bronze	B62 alloy 83600
Disc	Bronze	B62 alloy 83600
Stem	Brass	B16 alloy C36000

Dimensions and Weights

Millimeters - Kilograms

DN	1/2" 15	3/4" 20	1" 25	1 1/4" 32	1 1/2" 40	2" 50	2 1/2" 65	3" 80	4" 100
A	60	60	70	80	90	100	105	125	160
B	85	105	120	145	165	185	235	255	315
C	55	65	70	85	95	105	120	140	180
WTS.	0.50	0.70	1.00	1.25	1.75	2.50	5.60	8.00	12.00