


# Bronze Gate Valve

## Class 150 • Union Bonnet • Non-Rising Stem • Threaded Ends

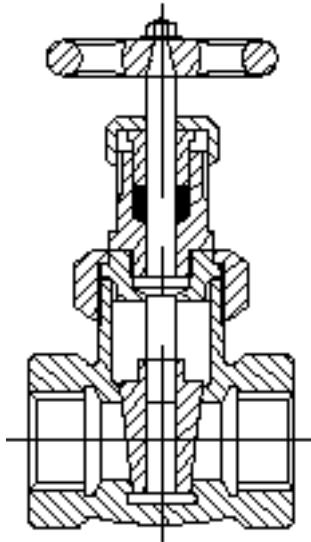

### Product no. 113100-150

#### Size Range:

1/2 through 4 inches  
Max. temperature limit is 450°F (232°C)

#### Working Pressures

##### Non-Shock:


150 psi Steam, Basic Rating  
300 psi Cold Working Pressure

### Features

- Non Rising Stem
- Union Bonnet
- Threaded Ends
- Solid Wedge
- Non Asbestos packing
- Full Ports
- Back Seat
- Integral Bronze Seat
- Recommended for WOG
- MSS Specification SP-80

For more details please contact:  
[export@oswalvalve.com](mailto:export@oswalvalve.com)

Above size 3" manufacturers standard applicable.

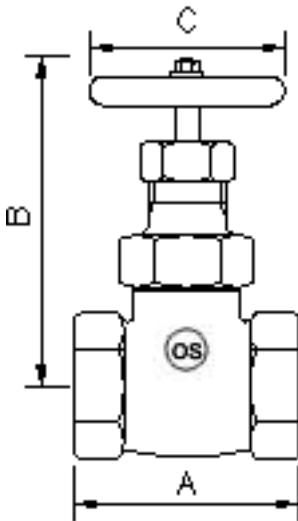

### Principal Parts & Materials

Part	Material	ASTM
Body	Bronze	B62 alloy 83600
Bonnet	Bronze	B62 alloy 83600
Disc	Bronze	B62 alloy 83600
Stem	Brass	B16 alloy C36000

### Dimensions and Weights

Millimeters - Kilograms

DN	1/2" 15	3/4" 20	1" 25	1 1/4" 32	1 1/2" 40	2" 50	2 1/2" 65	3" 80	4" 100
A	60	60	70	80	90	100	105	125	-
B	100	115	130	150	170	200	215	250	-
C	55	65	70	85	95	105	120	140	-
WTS.	0.80	1.00	1.50	2.10	2.60	4.40	6.90	9.40	-