


Bronze Gate Valve

Class 150 • Union Bonnet • Non-Rising Stem • Threaded Ends

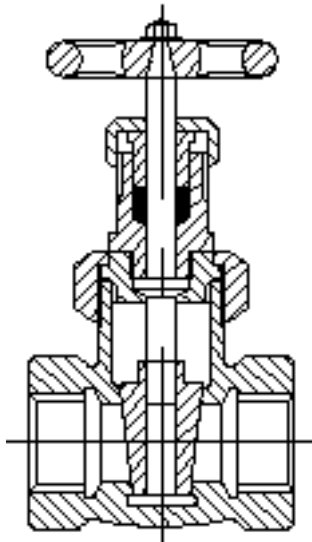

Product no. 113100 - 150s


Size Range:
1/2 through 4 inches
Max. temperature limit is 450°F (232°C)

Working Pressures
Non-Shock:
150 psi Steam, Basic Rating
300 psi Cold Working Pressure

- Features**
- Non Rising Stem
 - Union Bonnet
 - Threaded Ends
 - Solid Wedge
 - Non Asbestos packing
 - Full Ports
 - Back Seat
 - **Stainless Steel Seat Ring**
 - Recommended for WOG
 - MSS Specification SP-80

For more details please contact:
export@oswalvalve.com

Above size 3" manufacturers standard applicable.

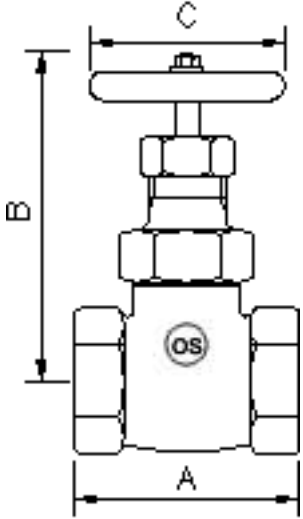

Principal Parts & Materials

Part	Material	ASTM
Body & Bonnet	Bronze	B62 alloy 83600
Disc	Bronze	B62 alloy 83600
Seat Ring	Stainless Steel	A276 S41000
Stem	Brass	B16 alloy C36000

Dimensions and Weights

Millimeters - Kilograms

DN	1/2" 15	3/4" 20	1" 25	1 1/4" 32	1 1/2" 40	2" 50	2 1/2" 65	3" 80	4" 100
A	60	60	70	80	90	100	105	125	-
B	100	115	130	150	170	200	215	250	-
C	55	65	70	85	95	105	120	140	-
WTS.	0.80	1.00	1.50	2.10	2.60	4.40	6.90	9.40	-