


Bronze Gate Valve

Class 200 • Union Bonnet • Non-Rising Stem • Threaded Ends

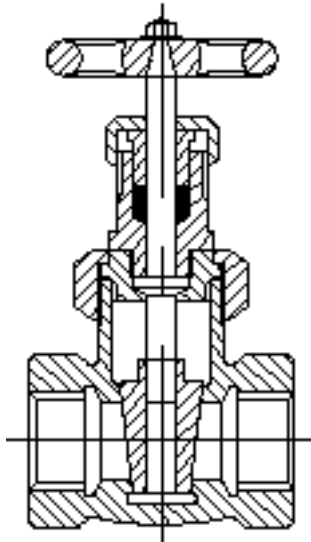

Product no. 113100 - 200s

Size Range:

1/2 through 3 inches
Max. temperature limit is 450°F (232°C)

Working Pressures


Non-Shock:

200 psi Steam, Basic Rating
400 psi Cold Working Pressure

Features

- Non Rising Stem
- Union Bonnet
- Threaded Ends
- Solid Wedge
- Non Asbestos packing
- Full Ports
- Back Seat
- **Stainless Steel Seat Ring**
- Recommended for WOG
- MSS Specification SP-80

For more details please contact:
export@oswalvalve.com

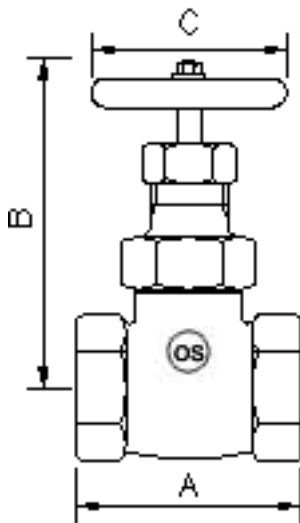

Principal Parts & Materials

Part	Material	ASTM
Body & Bonnet	Bronze	B62 alloy 83600
Disc	Bronze	B62 alloy 83600
Seat Ring	Stainless Steel	A276 S41000
Stem	Brass	B16 alloy C36000

Dimensions and Weights

Millimeters - Kilograms

DN	1/2" 15	3/4" 20	1" 25	1 1/4" 32	1 1/2" 40	2" 50	2 1/2" 65	3" 80	4" 100
A	60	60	70	80	90	100	105	125	160
B	100	115	130	150	170	200	215	250	-
C	55	65	70	85	95	105	120	140	-
WTS.	0.90	1.10	1.60	2.20	2.70	4.50	7.00	9.50	-