
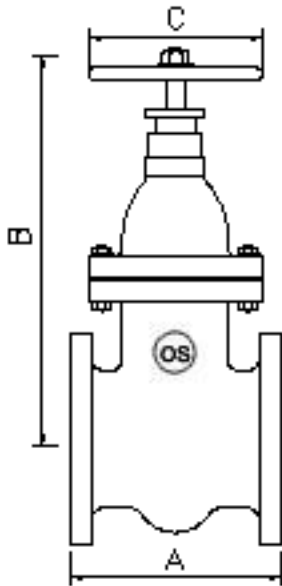


# Bronze Gate Valve

## Class 300 • Bolted Bonnet • Non-Rising Stem • Flanged Ends

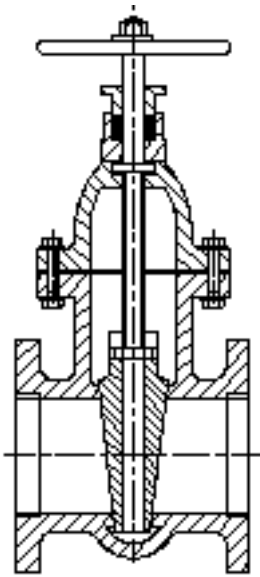

### Product no. 116200 - 300

#### Size Range:

1.1/2 through 3 inches  
Max. temperature limit is 450°F (232°C)

#### Working Pressures

##### Non-Shock:

300 psi Steam, Basic Rating  
500 psi Cold Working Pressure

### Features

- Non Rising Stem
- Bolted Bonnet
- Flanged Ends are plain faces with two V-shaped concentric grooves between the port and bolt holes.
- Full Ports
- Back Seat
- Integral Bronze Seat
- Recommended for WOG
- MSS Specification SP-80

For more details please contact:  
export@oswalvalve.com

Above size 3" manufacturers standard applicable.

### Principal Parts & Materials

Part	Material	ASTM
Body	Bronze	B62 alloy 83600
Bonnet	Bronze	B62 alloy 83600
Disc	Bronze	B62 alloy 83600
Stem	Brass	B16 alloy C36000

### Dimensions and Weights

Millimeters - Kilograms

DN	1 1/2" 40	2" 50	2 1/2" 65	3" 80	4" 100	6" 150	8" 200
A	130	150	180	200	-	-	-
B	230	245	290	315	-	-	-
C	120	135	160	160	-	-	-
WTS.	12.00	15.00	20.00	26.00	-	-	-