


Bronze Gate Valve

Class 150 • Union Bonnet • Rising Stem • Threaded Ends

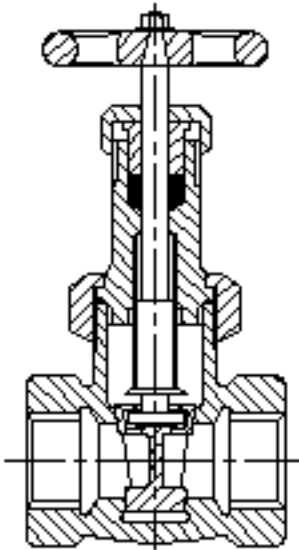

Product no. 114100 - 150s

Size Range:

1/2 through 3 inches

Max. temperature limit is 450°F (232°C)

Working Pressures

Non-Shock:


150 psi Steam, Basic Rating

300 psi Cold Working Pressure

Features

- Rising Stem
- Union Bonnet
- Threaded Ends
- Solid Wedge Disc
- Non Asbestos packing
- Full Ports
- Back Seat
- **Stainless Steel Seat Rings**
- Recommended for WOG
- MSS Specification SP-80

For more details please contact:
export@oswalvalve.com

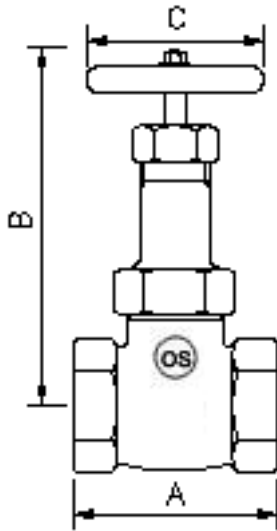

Principal Parts & Dimensions

Part	Material	ASTM
Body & Bonnet	Bronze	B62 alloy 83600
Disc	Bronze	B62 alloy 83600
Seat Ring	Stainless Steel	A276 S41000
Stem	Brass	B16 alloy C36000

Dimensions and Weights

Millimeters - Kilograms

DN	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"
	15	20	25	32	40	50	65	80	100
A	60	60	70	80	90	100	105	125	-
B	125	160	190	220	245	300	375	430	-
C	55	65	70	85	95	105	120	140	-
WTS.	0.60	0.80	1.20	1.60	2.60	4.60	6.60	9.60	-