
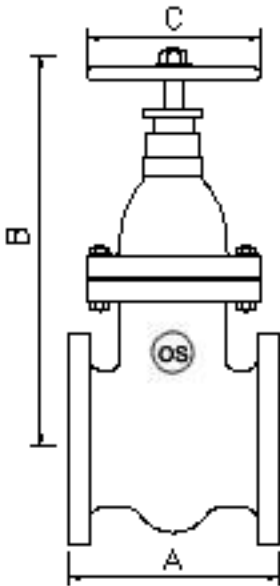


Bronze Gate Valve

Class 150 • Bolted Bonnet • Non-Rising Stem • Flanged Ends

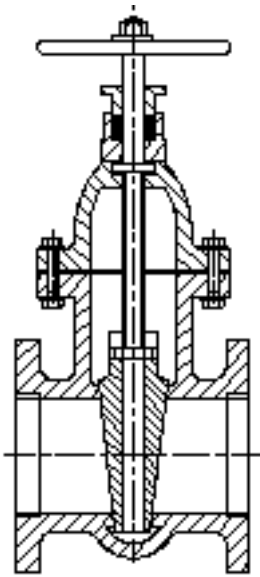

Product no. 116200 - 150

Size Range:

1.1/2 through 8 inches
Max. temperature limit is 450°F (232°C)

Working Pressures

Non-Shock:

150 psi Steam, Basic Rating
225 psi Cold Working Pressure

Features

- Non Rising Stem
- Bolted Bonnet
- Flanged Ends are plain faces with two V-shaped concentric grooves between the port and bolt holes.
- Full Ports
- Back Seat
- Integral Bronze Seat
- Recommended for WOG
- MSS Specification SP-80

For more details please contact:
export@oswalvalve.com

Above size 3" manufacturers standard applicable.

Principal Parts & Materials

Part	Material	ASTM
Body	Bronze	B62 alloy 83600
Bonnet	Bronze	B62 alloy 83600
Disc	Bronze	B62 alloy 83600
Stem	Brass	B16 alloy C36000

Dimensions and Weights

Millimeters - Kilograms

DN	1 1/2" 40	2" 50	2 1/2" 65	3" 80	4" 100	6" 150	8" 200
A	130	150	180	200	240	260	290
B	230	245	290	315	355	460	545
C	120	135	160	160	200	220	250
WTS.	09.00	10.00	16.00	20.00	30.00	48.00	90.00