


# Bronze Gate Valve

## Class 200 • Union Bonnet • Rising Stem • Threaded Ends

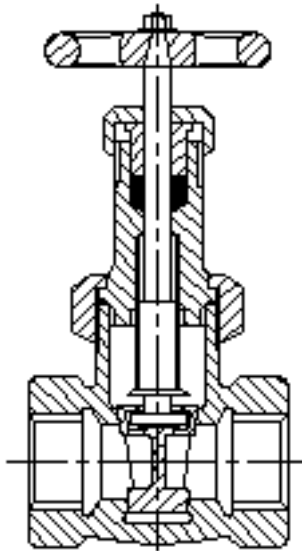

### Product no. 114100 - 200s

#### Size Range:

1/2 through 3 inches

Max. temperature limit is 450°F (232°C)

#### Working Pressures

##### Non-Shock:


150 psi Steam, Basic Rating

300 psi Cold Working Pressure

#### Features

- Rising Stem
- Union Bonnet
- Threaded Ends
- Solid Wedge Disc
- Non Asbestos packing
- Full Ports
- Back Seat
- **Stainless Steel Seat Rings**
- Recommended for WOG
- MSS Specification SP-80

For more details please contact:  
export@oswalvalve.com

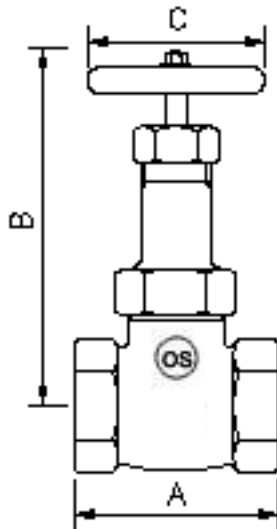

### Principal Parts & Dimensions

Part	Material	ASTM
Body & Bonnet	Bronze	B62 alloy C83600
Disc	Bronze	B62 alloy C83600
Seat Ring	Stainless Steel	A276 S41000
Stem	Brass	B16 alloy C36000

### Dimensions and Weights

Millimeters - Kilograms

DN	1/2" 15	3/4" 20	1" 25	1 1/4" 32	1 1/2" 40	2" 50	2 1/2" 65	3" 80	4" 100
A	60	60	70	80	90	100	105	125	160
B	125	160	190	220	245	300	375	430	-
C	55	65	70	85	95	105	120	140	-
WTS.	0.70	0.90	1.30	1.70	2.70	4.70	6.70	9.70	-